
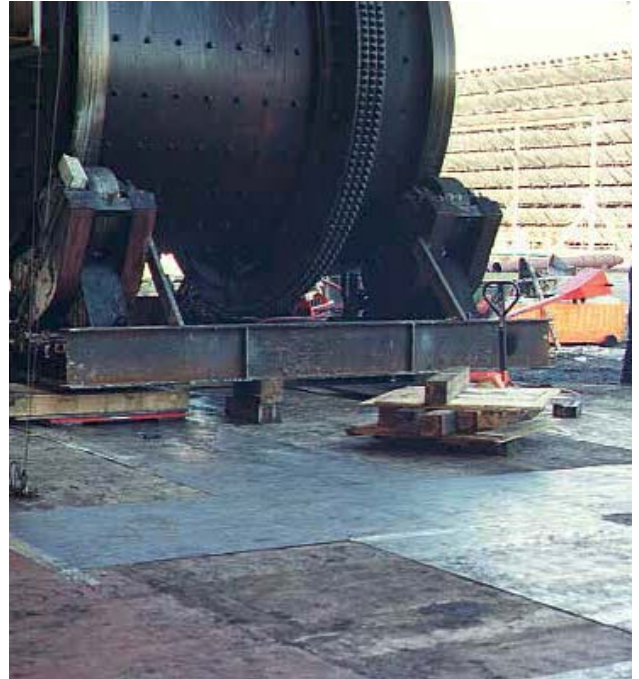


## Load Module System™

150 tons

Rigger: B&W Fuel Services

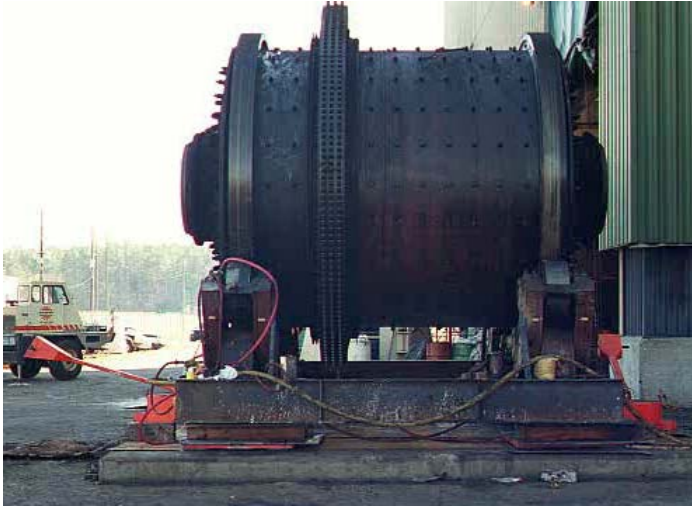

Gainsville Regional Utilities contracted B&W Fuel Services to remove 3 old coal pulverizers that weighed 150 tons each.

B&W purchased an AeroGo Load Module System™, equipped with 48-inch heavy duty Aero-Casters®, and two 3500 AeroGo drive units with QA Plates to get the job done. Because floor conditions were less than ideal, sheet metal had to be used to make the move. With only a quarter inch clearance, the load was transported 150 feet; angled through a door; and then side shifted 90° to a concrete pad just outside the building.

**RIG-7**